

A Division of ORCO Block & Hardscape

Antique Cobble Circle

Blend in perfect circles or graceful curves into your design. Or, use the individual pieces to create an organic old-world ambiance.


TYPICAL APPLICATIONS: Courtyard, Patio, Driveway
FINISH AND EDGES: Smooth; Pillow



STONE SHAPE	THICKNESS (MM)	DESCRIPTION (IN)	SIZE (IN)	STONES PER SQ FT	SQUARE FT PER PALLET
CIRCLE	60	VARIES	VARIES	VARIES	47

60 mm = 2.375 in (2 3/8 in); ALL SPECIFICATIONS ARE APPROXIMATE.

Common Patterns:

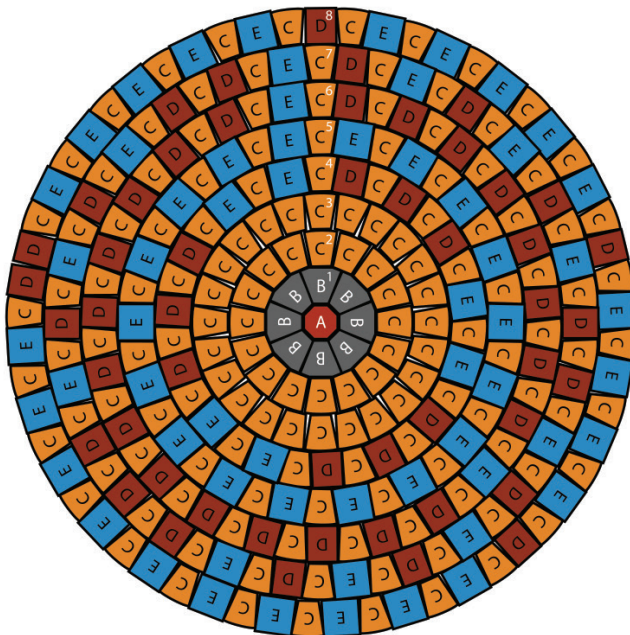

Kit Diameter 7'-10" [94"]

Ring	Diameter	A	B	C	D	E
0	5.9"	1				
1	16.9"		8			
2	28"			16		
3	39"			24		
4	50"			15	9	6
5	61"			18		18
6	72"			23	21	2
7	83"			26	15	11
8	94"			28	5	24

Total Stones 1 8 150 50 61

Additional Info:

Visit www.orco.com for the latest information on available color blends, solid colors, and patterns. Before ordering, always verify color and texture with pavingstone samples.

ORCO Block & Hardscape manufactures pavingstones in accordance with ASTM C936 Standard Specification for Solid Concrete Interlocking Paving Units (latest edition). And tested using ASTM C140 Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units (latest edition). ORCO certifies that our pavingstones average minimum compressive strength exceed 8000 psi with water absorption no greater than 5%.

For proper installation procedures, visit Interlocking Concrete Pavement Institute (ICPI) at www.icpi.org Tech Spec #2 – Construction of Interlocking Concrete Pavements. In addition, ICPI Guide Specifications provide information for installation of larger pavers, slabs, permeable systems, and using alternative setting beds like concrete, mortar, and bituminous asphalt. ICPI recommends using ICPI Certified Installers, who are trained in paver standards, materials, and techniques.

Complete ORCO Terms of Sale and applicable warranty information are available at www.orco.com



A Division of ORCO Block & Hardscape
WWW.ORCO.COM
©ORCO Block & Hardscape 05/17

