









OPCO Natural Stone \* Linear Planks \* Decking





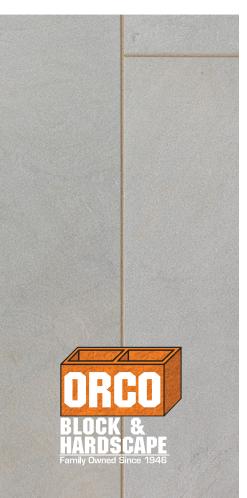



**TYPICAL APPLICATIONS:** Patios, Paseos, Balconies, Decking, Pool Decks **FINISH:** Shot Blast / Clear Blast

\*For non-vehicular applications. \*Sold by the pallet. No pieces.



COLOR	EDGE	THICKNESS-MM	DESCRIPTION-IN (MM)	QUANTITY / PALLET	SQ FT/PALLET	WT/PALLET-LB
CARMEL, GRIGIO,	SAWN	20	8 x 20 (200 x 500)	160	172.16	1870
TRESTLES, CALYPSO	SAWN	20	8 x 40 (200 x 1000)	80	172.16	1870
			8 <b>2</b> 0			

BEACHSIDE	SAWN	20	8 x 20 (200 x 500)	180	193.50	2103
	SAWN	20	8 x 40 (200 x 1000)	90	193.50	2103

## Common Patterns:


RUNNER - I	SHAPE
------------	-------

	_	


### ALTERNATING RUNNER - 2 SHAPE

			_
		,	
· · · · ·		<u> </u>	
			-
			-
			1
			-
		L	1
			-
			_

#### QUARTER RUNNER - I SHAPE



#### QUARTER RUNNER - 2 SHAPE



# Additional Info:

Visit ORCO.COM for the latest information on available colors, textures, and patterns. Before ordering, always verify color and texture with natural stone samples. All dimensions are approximate.

ORCO Natural Stone products are tested by the supplier in accordance with ASTM C616 Standard Specification for Quartz-Based Dimension Stone. Material characteristics and physical requirements covered by C616 include – absorption by weight, density, compressive strength, modulus of rupture and abrasion resistance.

For proper installation procedures, please download the ORCO Natural Stone Installation Guide by visiting ORCO.COM

