

YEARS
75+
THANK YOU



ORCO
BLOCK & HARDSCAPE
Family Owned Since 1946

6 x 12


A pavingstone with poise and grandeur, Del Mar combines simplicity with sophistication. Use multiple color blends and unique laying patterns.

TYPICAL APPLICATIONS:

60 MM: Plazas, Patios, Pool Decks, Terraces, Large Driveways

80MM: Plazas, Parking Lots, Entrances, Vehicular Areas

FINISH AND EDGES: Smooth; Bevel

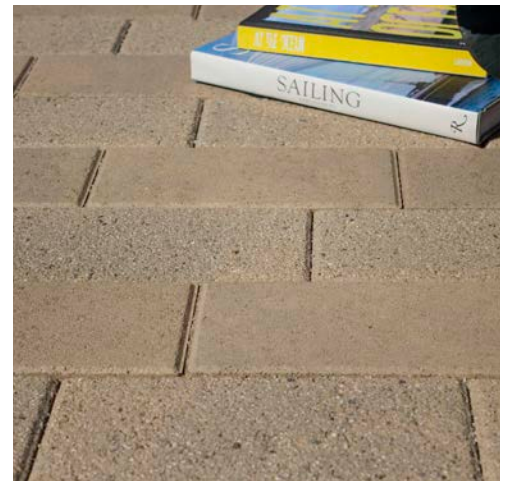


STONE SHAPE	THICKNESS (MM)	DESCRIPTION (IN)	SIZE (IN)	STONES PER SQ FT	SQUARE FT PER PALLET
RECTANGLE	60	6 x 12	5.87 x 11.75	2.0	124
RECTANGLE	80	6 x 12	5.87 x 11.75	2.0	93


60 mm = 2.375 in (2 $\frac{3}{8}$ in); 80 mm = 3.125 in (3 $\frac{1}{8}$ in); ALL SPECIFICATIONS ARE APPROXIMATE.

Common Patterns:


HERRINGBONE



RUNNER



BASKETWEAVE



Additional Info:

Visit ORCO.COM for the latest information on available color blends, solid colors, and patterns. Before ordering, always verify color and texture with pavingstone samples.

ORCO Block & Hardscape manufactures slab and plank pavingstones in accordance with ASTM C1782 Standard Specification for Utility Segmental Concrete Paving Slabs (latest edition).

For proper installation and design guidance, visit the Interlocking Concrete Pavement Institute (ICPI) at ICPI.ORG.

Tech Spec 24 - Structural Design of Segmental Concrete Paving Slab and Plank Pavement Systems, provides information on commercial applications.

Tech Spec 25 - Construction Guidelines for Segmental Concrete Paving Slabs and Planks in Non-Vehicular Residential Applications.

ICPI recommends using ICPI Certified Installers, who are trained in paver standards, materials, and techniques.

Complete ORCO Terms of Sale and applicable warranty information are available at ORCO.COM.



ORCO.COM

