

YEARS
75
 THANK YOU

ORCO
BLOCK & HARDSCAPE
 Family Owned Since 1946

Del Mar


A pavingstone with poise and grandeur, Del Mar combines simplicity with sophistication. Use multiple color blends and unique laying patterns.

TYPICAL APPLICATIONS:

60 MM: Plazas, Patios, Pool Decks, Terraces, Large Driveways

80MM: Plazas, Parking Lots, Entrances, Vehicular Areas

FINISH AND EDGES: Smooth; Bevel

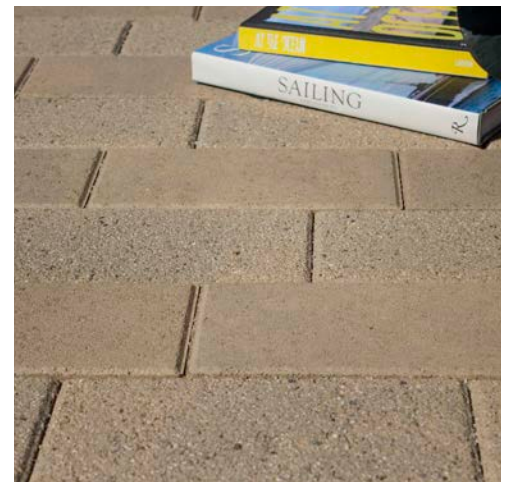


STONE SHAPE	THICKNESS (MM)	DESCRIPTION (IN)	SIZE (IN)	STONES PER SQ FT	SQUARE FT PER PALLET
SQUARE	60	6 x 6	5.87 x 5.87	4.0	124
RECTANGLE	60	6 x 12	5.87 x 11.75	2.0	124
RECTANGLE	80	6 x 12	5.87 x 11.75	2.0	93


60 mm = 2.375 in (2³/₈ in); 80 mm = 3.125 in (3¹/₈ in); ALL SPECIFICATIONS ARE APPROXIMATE.

Common Patterns:


HERRINGBONE



RUNNER



BASKETWEAVE



Additional Info:

Visit ORCO.COM for the latest information on available color blends, solid colors, and patterns. Before ordering, always verify color and texture with pavingstone samples.

ORCO Block & Hardscape manufactures pavingstones in accordance with ASTM C936 Standard Specification for Solid Concrete Interlocking Paving Units (latest edition). And tested using ASTM C140 Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units (latest edition). ORCO certifies that our pavingstones average minimum compressive strength exceed 8000 psi with water absorption no greater than 5%.

For proper installation procedures, visit Interlocking Concrete Pavement Institute (ICPI) at ICPI.ORG Tech Spec #2 – Construction of Interlocking Concrete Pavements. In addition, ICPI Guide Specifications provide information for installation of larger pavers, slabs, permeable systems, and using alternative setting beds like concrete, mortar, and bituminous asphalt. ICPI recommends using ICPI Certified Installers, who are trained in paver standards, materials, and techniques.

Complete ORCO Terms of Sale and applicable warranty information are available at ORCO.COM.

