



Turfstone

soften the look for your landscape with this open design. This paver allows grass and plants to grow for a natural effect, letting water flow through.

TYPICAL APPLICATIONS: Access Routes, Shore Stabilization, Overflow Parking, Slopes


FINISH AND EDGES: Smooth; Flat



STONE SHAPE	THICKNESS (MM)	DESCRIPTION (IN)	SIZE (IN)	STONES PER SQ FT	SQUARE FT PER PALLET
N/A	80	16 x 24	15.66 x 23.50	.38	124

80 mm = 3.125 in (3 1/8 in); ALL SPECIFICATIONS ARE APPROXIMATE.

Common Patterns:

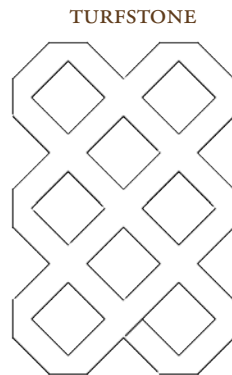

Additional Info:

Visit www.orco.com for the latest information on available color blends, solid colors, and patterns. Before ordering, always verify color and texture with pavingstone samples.

ORCO Pavingstones – a Division of ORCO Block & Hardscape manufactures turfstone paving units in accordance with ASTM C1319 Standard Specification for Concrete Grid Paving Units (latest edition) and tested using ASTM C140 Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units (latest edition). ORCO certifies that our turfstone units average minimum compressive strength exceed 5000 psi and average water absorption no greater than 10%.

For proper installation procedures, visit the Interlocking Concrete Pavement Institute (ICPI) at www.icpi.org. See Tech Spec #8 – Concrete Grid Pavements. ICPI recommends using ICPI Certified Installers, who are trained in paver standards, materials, and techniques.



A Division of ORCO Block & Hardscape



WWW.ORCO.COM
©ORCO Block & Hardscape 05/17